


DRAKO 130 L, 175 L

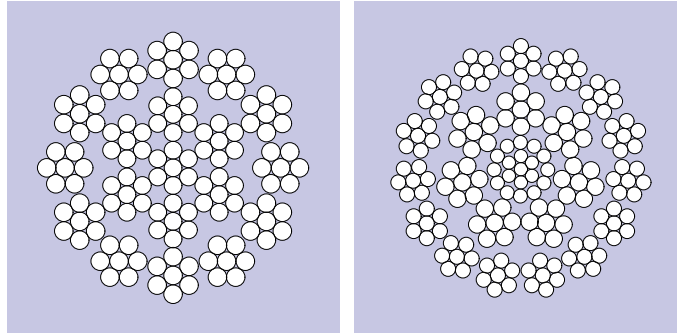

	130 L	175 L
Rope diameter	7–10 mm	12–20 mm
Type of lay	lang lay	
Direction of lay	right, alternativley left	
Core	steelcore	
Number of outer strands	12	15
Number of load bearing wires in the outer strands	84	105
Surface of wire	galvanized (B)	

Characterisation extrem rotation resistant
Applications electric hoist, deck crane

Discard criteria determined according to DIN 15020 part 2, ISO 4309

Nominal rope-Ø + 2 + 4 % mm	Approx. mass kg/100m	Minimum breaking force/rope grade
		kN/1960
7	21	39,0
8	26	53,3
10	44	80,6
12	61	119,0
14	88	159,0
16	115	211,0
18	145	265,0
20	180	328,0