


## DRAKO BA 6x19 S

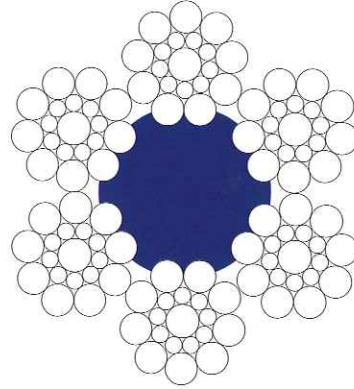

Rope Diameter	14 – 24 mm
Total number of wires	114
Total number of strands	6
Number of outer strands	6
Number of load bearing wires in the outer strands	114

Characterisation	Flexible rope with polypropylene fibre core
Applications	Hauling rope for drag lifts, aerial tramways, funiculars and material ropeways Carrying- hauling rope for small ropeways

Nominal rope-Ø -0 +5 %  mm	Approx mass  kg/m	Minimum breaking force for a rope grade of					
		1570 N/mm <sup>2</sup> kN	1670 N/mm <sup>2</sup> kN	1770 N/mm <sup>2</sup> kN	1860 N/mm <sup>2</sup> kN	1960 N/mm <sup>2</sup> kN	2060 N/mm <sup>2</sup> kN
14	0,66	105	111	118	124	131	136
15	0,82	130	138	147	154	162	169
16	0,89	141	150	159	168	177	183
17	1,00	159	169	179	188	198	206
18	1,15	182	194	206	216	228	237
19	1,23	195	208	220	231	244	253
20	1,40	223	237	251	264	278	289
21	1,53	243	258	273	287	303	315
22	1,68	267	284	301	316	333	347
23	1,87	297	316	335	352	371	386
24	2,04	324	345	366	384	405	421

Technical data for further rope-Ø are available on request.