


DRAKO XA 6x25 F

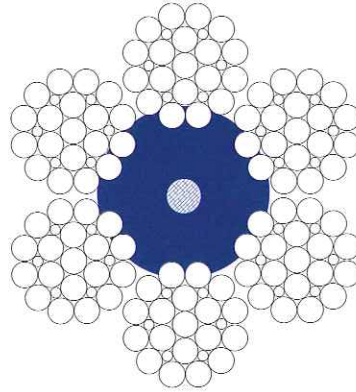

Rope Diameter	23 – 40 mm
Total number of wires	150
Total number of strands	6
Number of outer strands	6
Number of load bearing wires in the outer strands	114

Characterisation	Flexible rope with special fibre core (centre reinforced wire and extruded coating) for low elongation
Applications	Hauling rope for aerial tramways and funiculars Carrying- hauling rope for ropeways, fixed grip and detachable

Nominal rope-Ø -0 +5 % mm	Approx mass kg/m	Minimum breaking force for a rope grade of					
		1570 N/mm ² kN	1670 N/mm ² kN	1770 N/mm ² kN	1860 N/mm ² kN	1960 N/mm ² kN	2060 N/mm ² kN
23	1,86	288	306	325	341	360	374
24	2,11	327	348	369	388	408	424
25	2,24	348	370	392	412	434	451
26	2,38	369	393	416	438	461	479
27	2,67	414	441	467	491	517	537
28	2,83	439	467	495	520	548	569
29	2,98	463	492	522	548	578	600
30	3,22	500	531	563	592	624	648
31	3,41	530	563	597	627	661	687
32	3,67	570	607	643	676	712	740
33	3,85	598	636	674	708	746	775
34	4,12	639	680	720	757	798	829
35	4,40	684	727	771	810	854	887
36	4,60	714	759	805	845	891	926
37	4,89	759	807	855	899	947	984
38	5,15	800	851	902	947	998	1037
39	5,36	832	885	938	986	1039	1079
40	5,69	883	939	995	1046	1102	1145

Technical data for further rope-Ø are available on request.