


DRAKO XA 6 x 36 WS

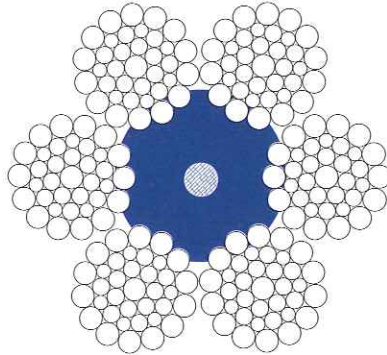

Rope Diameter	33 – 50 mm
Total number of wires	216
Total number of strands	6
Number of outer strands	6
Number of load bearing wires in the outer strands	216

Characterisation	Flexible rope with special fibre core (centre reinforced wire and extruded coating) for low elongation
Applications	Hauling rope for aerial tramways and funiculars Carrying- hauling rope for ropeways, fixed grip and detachable

Nominal rope-Ø -0 +5 % mm	Approx mass kg/m	Minimum breaking force for a rope grade of					
		1570 N/mm ² kN	1670 N/mm ² kN	1770 N/mm ² kN	1860 N/mm ² kN	1960 N/mm ² kN	2060 N/mm ² kN
33	3,90	598	636	674	709	747	776
34	4,09	628	668	708	744	784	814
35	4,31	661	703	745	783	825	857
36	4,69	719	765	811	852	898	933
37	4,87	747	794	842	885	932	968
38	5,14	789	839	889	934	985	1023
39	5,45	837	890	943	991	1044	1085
40	5,74	881	937	994	1044	1100	1143
41	5,97	917	975	1033	1086	1144	1189
42	6,27	961	1023	1084	1139	1200	1247
43	6,61	1015	1079	1144	1202	1267	1316
44	6,94	1064	1132	1200	1261	1329	1380
45	7,32	1124	1195	1267	1331	1403	1458
46	7,61	1167	1242	1316	1383	1457	1514
47	7,82	1200	1276	1353	1421	1498	1556
48	8,22	1261	1341	1422	1494	1574	1635
49	8,53	1309	1393	1476	1551	1635	1698
50	8,80	1351	1437	1523	1600	1686	1752

Technical data for further rope-Ø are available on request.