


## DRAKO XA 6x7

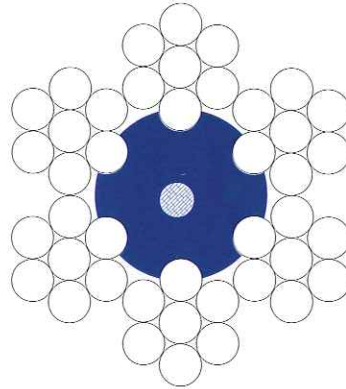

Rope Diameter	25 – 33 mm
Total number of wires	42
Total number of strands	6
Number of outer strands	6
Number of load bearing wires in the outer strands	42

Characterisation	Robust rope with special fibre core (centre reinforced wire and extruded coating) for low elongation
Applications	Hauling rope for funicular Carrying- hauling rope for ropeways

Nominal rope-Ø -0 +5 % mm	Approx mass kg/m	Minimum breaking force for a rope grade of					
		1570 N/mm <sup>2</sup> kN	1670 N/mm <sup>2</sup> kN	1770 N/mm <sup>2</sup> kN	1860 N/mm <sup>2</sup> kN	1960 N/mm <sup>2</sup> kN	2060 N/mm <sup>2</sup> kN
25	2,07	333	354	375	394	415	432
26	2,23	358	381	404	424	447	465
27	2,39	384	409	433	455	480	499
28	2,56	412	438	464	488	514	534
29	2,75	442	470	498	524	552	573
30	2,93	471	501	531	558	588	611
30,5	3,03	486	517	548	576	607	631
31	3,12	501	533	565	594	626	650
32	3,31	532	566	600	631	664	691
33	3,51	564	600	636	668	704	732

Technical data for further rope-Ø are available on request.